

# XT HANDLAMP CHARGER BANK



WITHOUT COMPROMISE


## PRODUCT INFORMATION

The WolfLite® XT Handlamp Charger Bank charges up to five XT Rechargeable LED Handlamps from a single power source.

Wall mounted, the 100-254VAC banking system also allows easy storage of the lamps.

- XT-615 Charger bank with 5 WolfLite XT Handlamps Recharging

Single Power Source

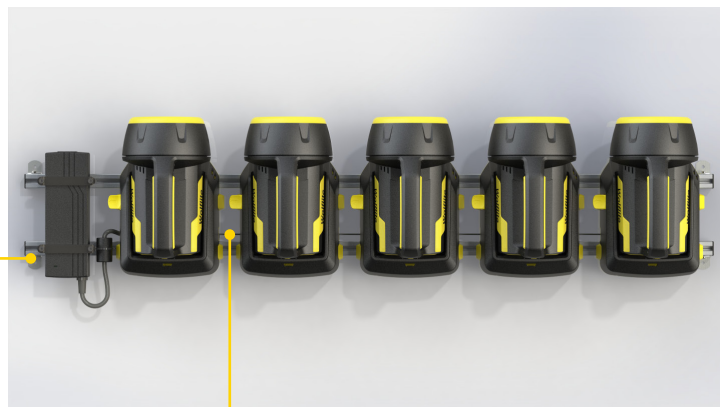

Wall Mounted Rails

## TECHNICAL INFORMATION

### FEATURES

- Single power source
- Quick and easy installation
- Fast recharge times:
  - » XT-50 charges to 90% in 2 hours, 100% in 3 hours
  - » XT-70/75 charges to 90% in 2.5 hours, 100% in 3.5 hours
  - » XT-90 charges to 90% in 3 hours, 100% in 4 hours
- Wall Mounted, Flat Surface & Bulk Head mounting options

XT Handlamp Charger Bank			
PRODUCT REFERENCE	XT-613	XT-614	XT-615
PRODUCT DESCRIPTION	XT Handlamp Charger Bank		
FOR NO. HANDLAMPS	3	4	5
INSULATION CLASS	III		
ENCLOSURE	Thermoplastic		
INPUT VOLTAGE	100-254VAC		
PEAK CURRENT	4.5A	6A	7.5A
RECHARGE TIME	XT-50 charges to 90% in 2 hours, 100% in 3 hours XT-70/75 charges to 90% in 2.5 hours, 100% in 3.5 hours XT-90 charges to 90% in 3 hours, 100% in 4 hours		
INGRESS PROTECTION	IP20		
WEIGHT (WITHOUT HANDLAMPS)	2.23kg	2.76kg	3.2kg
MOUNTING	Wall Mounted / Flat Surface / Bulk Head		
COMPATIBLE HANDLAMPS	XT-50, XT-70, XT-75 & XT-90		

All information has been gathered under laboratory conditions, the user must regard the values given as approximate. Changes may be made to the above specification without notification, details are available on request.



Wolf Safety Lamp Company  
Saxon Road Works, Sheffield S8 0YA, UK

T: +44 (0) 114 255 1051  
E: [info@wolfsafety.com](mailto:info@wolfsafety.com)

